

CERTS LAND

CompTIA

# 220-1001 EXAM

CompTIA A+ Core 1

Thank you for downloading 220-1001 exam PDF Demo

**Limited Content Questions and Answers**

<https://www.certsland.com/220-1001-dumps/>

www.certsland.com

# Version: 36.0

---

## Question: 1

---

Laura, a customer, has instructed you to configure her home office wireless access point. She plans to use the wireless network for finances and has requested that the network be setup with the highest encryption possible.

Additionally, Laura knows that her neighbors have wireless networks and wants to ensure that her network is not being interfered with by the other networks.

She requests that the default settings be changed to the following.

Wireless Name: HomeWiFi

Shared Key: CompTIA

Router Password: Secure\$1

Finally, Laura wants to ensure that only her laptop and Smartphone can connect to the network.

Laptop: IP Address 192.168.1.100

Hardware Address: 00:0A:BF:03:C4:54

Smartphone: IP Address 192.168.1.101

Hardware Address: 09:2C:D0:22:3F:11

### INSTRUCTIONS

Configure Laura's wireless network using the network adapter window.

If at any time you would like to bring back the initial state of the situation, please click the Reset All button.

### Laura's Wireless Configuration

WIRELESS SETUP
NETWORK FILTER
ADMINISTRATOR TOOLS

#### Wireless Network Settings

Enable Wireless:

Wireless Network Name:  (Also called the SSID)

Wireless Channel:

Disable SSID Broadcast:

802.11g Only Mode:

#### Wireless Security Mode

Security Mode:

#### WPA2

Passphrase:

Confirmed Passphrase:

### Laura's House



- 

Wireless Network Name:	Default
Security Mode:	Open
Wireless Channel:	11
- 

Wireless Network Name:	MyWi
Security Mode:	WEP
Wireless Channel:	6
- 

Wireless Network Name:	PatsWiFi
Security Mode:	WEP
Wireless Channel:	11

### Laura's Wireless Configuration

WIRELESS SETUP
NETWORK FILTER
ADMINISTRATOR TOOLS

Please enter the same password into both boxes for confirmation.

Password:

Verify Password:

**Laura's Wireless Configuration**

**WIRELESS SETUP**   **NETWORK FILTER**   **ADMINISTRATOR TOOLS**

**Wireless Network Settings**

Enable Wireless:

Wireless Network Name:  (Also called the SSID)

Wireless Channel:

Disable SSID Broadcast:

802.11g Only Mode:

**Wireless Security Mode**

Security Mode:

**Laura's Wireless Configuration**

**WIRELESS SETUP**   **NETWORK FILTER**   **ADMINISTRATOR TOOLS**

Turn MAC Filtering ON:

- 
- 
- 
- 


---

**Answer: See the explanation below**

---

Explanation:

solution as

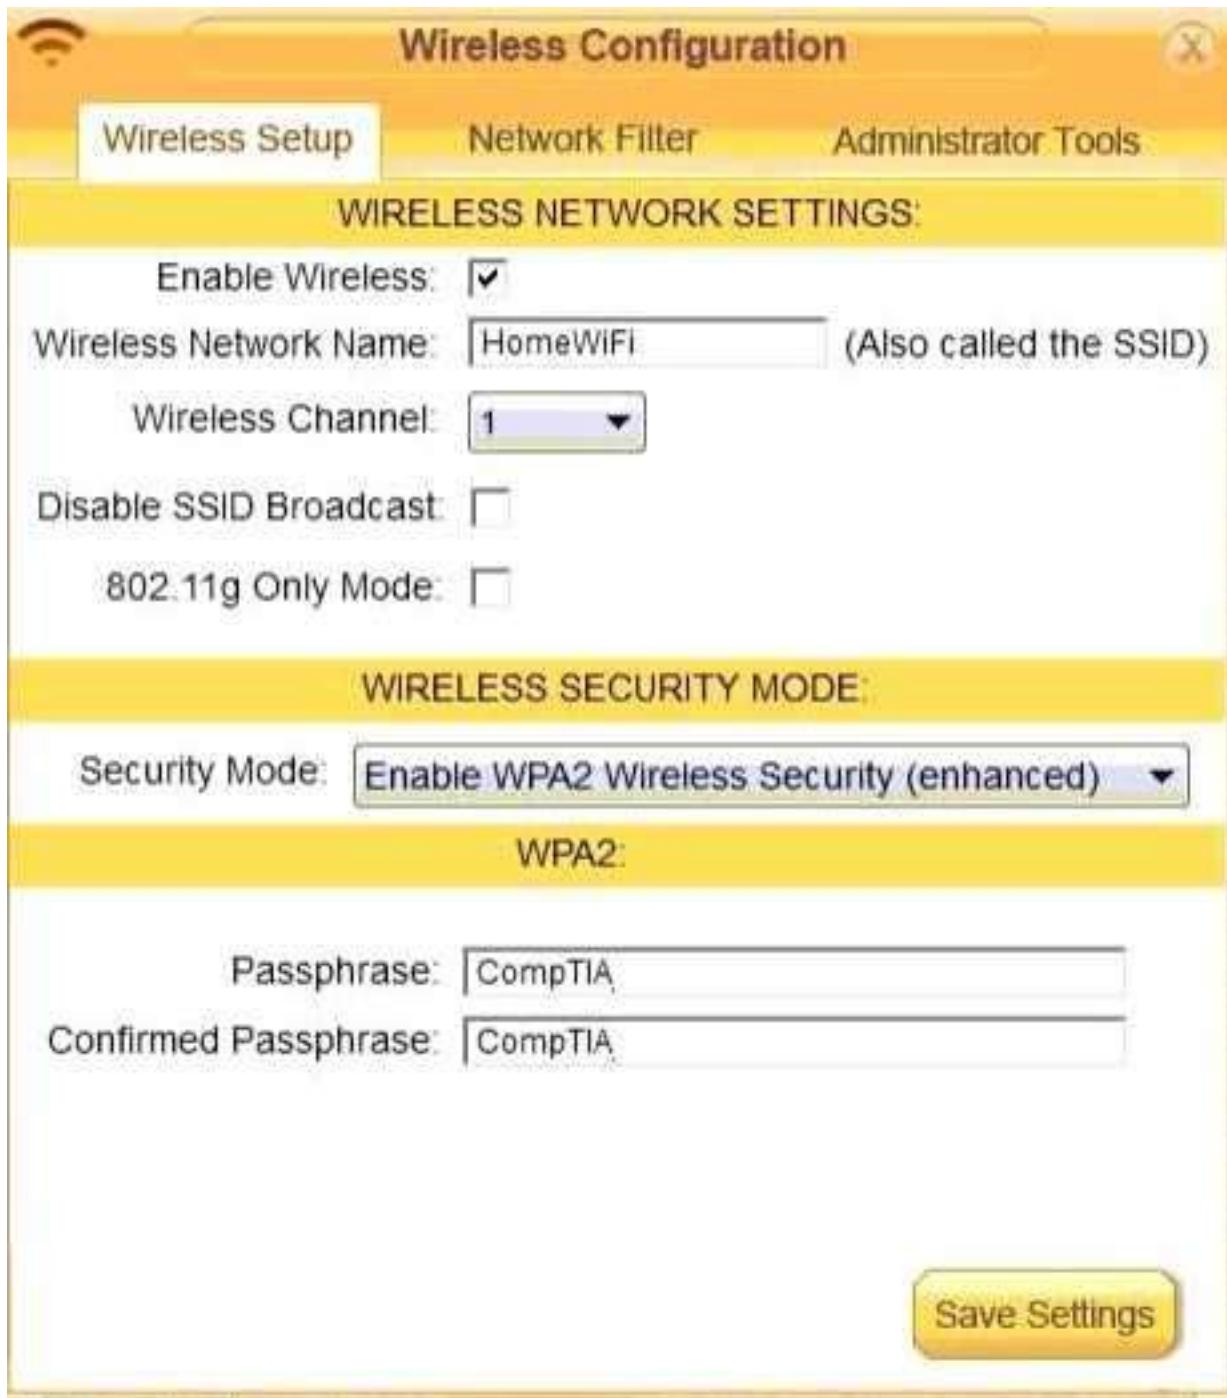

The image shows a 'Wireless Configuration' window with three tabs: 'Wireless Setup', 'Network Filter', and 'Administrator Tools'. The 'Wireless Setup' tab is active. The window is divided into three sections: 'WIRELESS NETWORK SETTINGS', 'WIRELESS SECURITY MODE', and 'WPA2'. In the 'WIRELESS NETWORK SETTINGS' section, 'Enable Wireless' is checked, 'Wireless Network Name' is 'HomeWiFi', 'Wireless Channel' is '1', 'Disable SSID Broadcast' is unchecked, and '802.11g Only Mode' is unchecked. In the 'WIRELESS SECURITY MODE' section, 'Security Mode' is set to 'Enable WPA2 Wireless Security (enhanced)'. In the 'WPA2' section, both 'Passphrase' and 'Confirmed Passphrase' are 'CompTIA'. A 'Save Settings' button is located at the bottom right.

**Wireless Configuration**

Wireless Setup    Network Filter    Administrator Tools

**WIRELESS NETWORK SETTINGS:**

Enable Wireless:

Wireless Network Name:  (Also called the SSID)

Wireless Channel:

Disable SSID Broadcast:

802.11g Only Mode:

**WIRELESS SECURITY MODE:**

Security Mode:

**WPA2:**

Passphrase:

Confirmed Passphrase:

Save Settings



The image shows a web-based configuration interface titled "Wireless Configuration". It has three tabs: "Wireless Setup", "Network Filter" (which is active), and "Administrator Tools". Under the "Network Filter" tab, there is a checked checkbox labeled "Turn MAC Filtering ON". Below this is a dropdown menu currently set to "Allow the following MAC Addresses". A table with the heading "MAC Address" contains four rows. The first two rows have checked checkboxes and contain the MAC addresses "00:0A:BF:03:C4:54" and "09:2C:D0:22:3F:11". The last two rows have unchecked checkboxes and empty text boxes. A "Save Settings" button is located at the bottom right of the interface.

MAC Address	
<input checked="" type="checkbox"/>	00:0A:BF:03:C4:54
<input checked="" type="checkbox"/>	09:2C:D0:22:3F:11
<input type="checkbox"/>	
<input type="checkbox"/>	



The image shows a screenshot of a web-based configuration interface titled "Wireless Configuration". The interface has a yellow header with a wireless signal icon on the left and a close button (X) on the right. Below the header are three tabs: "Wireless Setup", "Network Filter", and "Administrator Tools". The "Administrator Tools" tab is selected. Underneath the tabs is a yellow bar with the text "ADMIN PASSWORD". Below this bar, there is a message: "Please enter the same password into both boxes for confirmation." There are two input fields: "Password:" and "Verify Password:". Both fields contain the text "Secure\$1". At the bottom right of the form is a yellow button labeled "Save Settings".

---

**Question: 2**

---

DRAG DROP

Drag each mobile technology to the description of its use. Some answers will not be used.

Description	Wireless technology
Devices use haptic confirmation for sharing data wirelessly.	NFC
Devices are paired using a code for sharing data wirelessly.	Hotspot
Devices are placed in close proximity within line of sight for sharing data wirelessly.	IR
Devices are connected via a wire for sharing data or connectivity.	Tethering
	Bluetooth
	Cellular
	Lightning

**Answer:**

Explanation:

1. NFC
2. Bluetooth
3. IR
4. Tethering

---

**Question: 3**

DRAG DROP

A customer, Ann, has requested two custom PCs, one to be used for gaming and the other to be used as a virtualization workstation for her business.

The gaming PC should support the latest games and gaming peripherals.

The virtualization workstation should be able to host several production virtual machines as part of Ann’s home business.

**INSTRUCTIONS**

Use the tabs at the top to switch between the PCs.

Objects should be placed on the appropriate slot/display areas and can only be used once.

All slot/display areas should be filled.

If at any time you would like to bring back the initial state of the simulation, please click the Reset All



button.



**Answer:**

Explanation:



**Question: 4**

The network administrator has changed the IP address of ComputerA from 192.168.1.20 to 10.10.10.20 and now jane, a user, is unable to connect to file shares on ComputerA from ComputerB using the computer name.

**INSTRUCTIONS**

Using the available tools, resolve the connectivity issues.  
 After troubleshooting the issue, verify a successful connection.  
 If at any time you would like to bring back the initial state of the simulation? please click the Reset All button.

```
-----  
--- Welcome to Computer A -----  
-----  
  
c: > |
```

```
Reply from 10.10.10.10.30: bytes=32 time=13ms FTL=52
Reply from 10.10.10.10.30: bytes=32 time=13ms FTL=52

Ping statistics for 10.10.10.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 13ms, Maximum = 13ms, Average = 13ms

c:\> ?
    % Invalid input detected, query help for valid commands.
c:\> help

    ipconfig
    nslookup
    ping
    tracert

    help

c:\> nslookup
    % Invalid input detected, query help for valid commands.
c:\> nslookup
    % Invalid input detected, query help for valid commands.
c:\> help

    ipconfig
    nslookup
    ping
    tracert
    help

c:\>
```

```
-----  
--- Welcome to Computer B -----  
-----  
  
c:\>
```

```
-----  
  
c:\> ipconfig  
  
Windows IP Configuration  
  
Ethernet adapter Ethernet:  
  
    Connection-specific DNS Suffix . . . . . : local.net  
    IPv4 Address . . . . . : 10.10.10.30  
    Subnet Mask . . . . . : 255.255.255.0  
    Default Gateway . . . . . : 10.10.10.1  
  
c:\> ping 10.10.10.20  
  
Pinging 10.10.10.20 with 32 bytes of data:  
Reply from 10.10.10.20: bytes=32 time=13ms TTL=52  
Reply from 10.10.10.20: bytes=32 time=13ms TTL=52  
Reply from 10.10.10.20: bytes=32 time=13ms TTL=52  
Reply from 10.10.10.20: bytes=32 time=13ms TTL=52  
  
Ping statistics for 10.10.10.20:  
    Packets: Sent = 4, Received = 4, Loat = 0 (0% loss),  
    Approximate round trip times in milli-seconds:  
        Minimum = 13ms, Maximum = 13ms, Average = 13ms  
  
c:\> nslookup  
    % Invalid input detected, query help for valid commands.  
c:\>  
computerB
```

---

**Answer: See the  
explanation below:**

---

Explanation:

We need to flush the DNS to have the new IP address assigned to the same computer name. Use the ipconfig/flushdns command.

---

**Question: 5**

---

A technician is troubleshooting what appears to be a RAM issue on a PC. Which of the following symptoms would indicate if this is a RAM issue?

- A. POST code beeps
- B. Distended capacitors
- C. Continuous reboots
- D. Wrong BIOS time

---

**Answer: C**

---

**Thank You for trying 220-1001 PDF Demo**

<https://www.certsland.com/220-1001-dumps/>

## Start Your 220-1001 Preparation

**[Limited Time Offer]** Use Coupon “**certs20**” for extra 20% discount on the purchase of PDF. Test your 220-1001 preparation with actual exam questions.